

User manual





KR-S61A



Preface

Dear Customers:

Thanks for choosing card cabinet lock offered by Kerong Industry (HK) Co ., Limited . Please read this $\langle\!\langle$ User Manual $\rangle\!\rangle$ carefully before using.

Thanks for your kind understanding and support!




Contents

1. Product	1
2. Product Appearance	2
2.1 Lock body	2
2.2 Lock hook	2
2.3 Card	2
2.4 Screws	2
2.5 External power supply	3
3. Product Installation Dimensions	4
4. Product Functions	7
4.1 Functions & Features	7
4.2 Parameters	7
5. Operations	9
5.1 Public Mode	9
5.1.1 Mode introduction.	9
5.1.2 Set lock into public mode	10
5.1.3 Set manager card	10
5.1.4 Set user card	10
5.1.5 How to use user card	10
5.1.6 Set delete card	10
5.2 Private Mode	11
5.2.1 Mode introduction	11
5.2.2 Set lock into private mode	11
5.2.3 Set manager card	12
5.2.4 Set user card	12
5.2.5 How to use user card	
5.2.6 Set delete card	12
5.3 Limited Public Mode	
5.3.1 Mode introduction	13
5.3.2 Set lock into limited public mode	13
5.3.3 Set manager card	13
5.3.4 Set user card	14
5.3.5 How to use user card	14
5.3.6 Set delete card	14
6. Reset Lock	15
7. Warm Tins	15



1. Relative Products

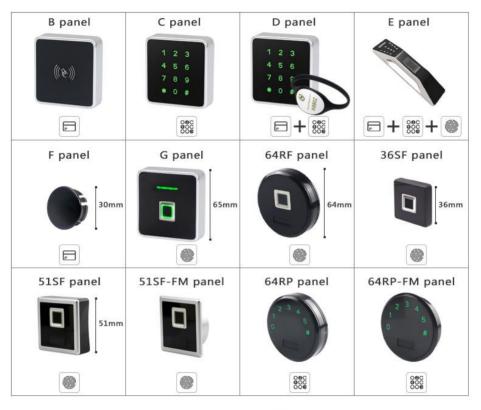

S61 lock body





2. Product Appearance

2.1 Lock body Material: ABS

Size: 61*61*22 mm

2.2 Lock hook Suitable lock hook for different installation ways.

2.3 CardDifferent shapes of cards available:wrist band, tag fob, rectangle card and so on.

2.4 Screws Suitable screws for different material cabinets (wooden/metal) and different door thickness.

2.5 External power supply

With external battery box and power adaptor to work with lock body or front panel for emergency power supply.

KERONG®

















3. Product Installation Dimension

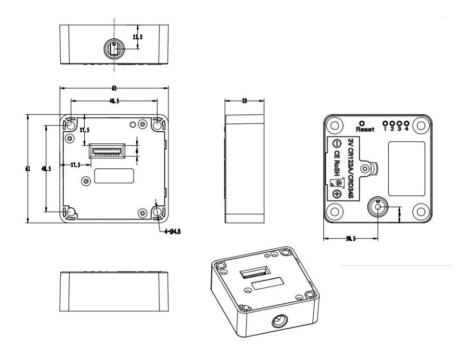

Lock body



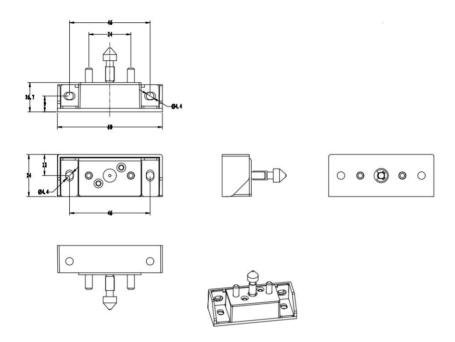

Hook



4. Product Functions

4.1 Parameters

Material	ABS for lock body shell, Acrylic & PC for panel
Power consumption	Load current < 200mA
	Locked-rotor current < 350mA
	Standby current < 20mA
	Statistic current < 50uA @3V
	CR123A/CRD345 3V battery
Working voltage	Voltage: 2.1V~3.3V
	Low voltage alarm: 2.5V±0.1V
	Ultimate low voltage: 2.1V, can operate the last unlock
Working environment	Working temperature -15°C ~ +65°C
	Working humidity 10% ~ 90%RH
Anti-static	Air static 15KV
	Touch static 8KV

4.2 Functions & Features

Functions	Features
Sound prompt	Lock will prompt with sound when swipe correct/wrong card,
	battery is in low voltage, unlocking for a long time
	Green: correct operation
Light prompt	Red: wrong operation
	Blue: low voltage
	White: standby status



	Low voltage alarm: 1. When battery's voltage is lower than 2.5V, light will shine in blue and lock sounds "di di" for 8 times on every opening to remind user to change new battery. 2. When voltage is less than 2.1V, lock can't be locked until change new battery.
Alarm functions	Lock status alarm: 1. Lock will keep warning for 10s if it keeps unlocking status more than 30s. 2. ※ Lock status alarming function only exists in private mode. Press button 1+2 can enable/disable this function.
	Locking protection:
	Input wrong code/card, lock will shine in red twice and prompt with "di di". Wrong for 5 times continuously, lock will be unavailable for 5mins.
	During unavailable period:
	 Use manager card/code can make it available. Input user code/card lock will prompt with "di di di di di" and light shines in red.
Card functions	 Manager card: For setting user card, also can be used for emergency unlock in public mode. User card: Only be used for unlocking. Delete card: For deleting all user cards at one time, or delete a specific card. Master card: For emergency unlocking.
	Button 1: Set manager card and user card.
	Button 2: Set delete card.
	Button 3: Change working mode.
Button functions	Button 4: Change to single key mode or double key mode. Reset: Reset the lock.
Functional cards	 Change working mode by card. Enable & disable lock status alarm function by card. Enable & disable lock sound by card.



4. Function cards can be encrypted.	Only these encrypted
function cards can set the lock.	


5. Users can use their own cards that are compatible with our lock, but function cards only can be Mifare 1 card.

5. Operations

5.1 Public Mode

5.1.1 Mode introduction

Lock keeps unlocking under public mode, manager card should be programmed first(manager card can use for emergency unlock). Any card to lock and same card to unlock.

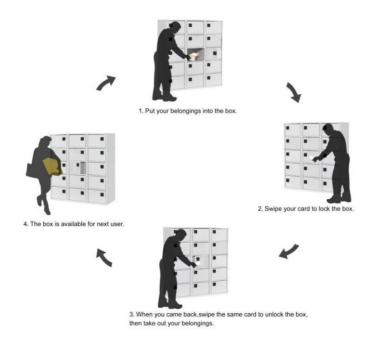



5.1.2 Set lock into public mode



5.1.3 Set manager card




Notice:

- 1. While green light is flashing, user can set manager card continuously. One lock can have max 10pcs manager cards.
- 2. Manager card can be used for emergency unlock in public mode.

5.1.4 Set user card

* In public mode, no need to set user card. Input any card can lock, then same card to unlock.

5.1.5 How to use user card



5.1.6 Set delete card






Notice:

- 1. While green light is flashing, user can set delete card continuously. One lock can have max 10pcs delete cards.
- 2. Swipe the delete card, all user cards will be invalid, then need to set again.
- 3. If you want to delete one user card at one time, please let us know in advance.

5.2 Private Mode

5.2.1 Mode introduction

Lock keeps locking under private mode, manager card and user card should be programmed first(manager card only for programming user card). Push the door to close, and use the user card to unlock.

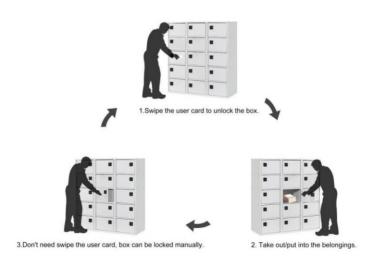



5.2.2 Set lock into private mode



5.2.3 Set manager card



Notice:

- 1. While green light is flashing, user can set manager card continuously. One lock can have max 10pcs manager cards.
- 2. Manager card cannot use for emergency unlock, just for setting user card.

5.2.4 Set user card



Notice:

1. While green light is flashing, user can set user card continuously. One lock can have max 30pcs user cards.

5.2.5 How to use user card



5.2.6 Set delete card






Notice:

- 1. While green light is flashing, user can set delete card continuously. One lock can have max 10pcs delete cards.
- 2. Swipe the delete card, all user cards will be invalid, then need to set again.
- 3. If you want to delete one user card at one time, please let us know in advance.

5.3 Limited Public Mode

5.3.1 Mode introduction

Lock keeps locking first under limited public mode, manager card and user card should be programmed first(manager card only for programming user card). Lock will keep unlocking after unlocked, then swipe user card, push the door can close the box.

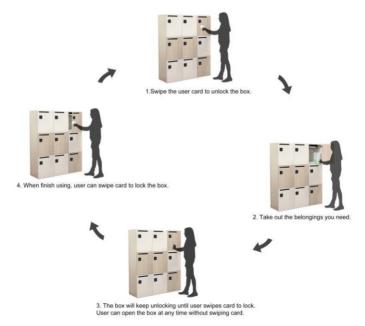



5.3.2 Set lock into limited public mode



5.3.3 Set manager card



Notice:

- 1. While green light is flashing, user can set manager card continuously. One lock can have max 10pcs manager cards.
- 2. Manager card cannot be used for emergency unlock, just for setting user card.

5.3.4 Set user card



Notice:

- 1. While green light is flashing, user can set user card continuously. One lock can have max 30pcs user cards.
- 2. If user card is lost, you can use manager card to set a new user card to unlock.

5.3.5 How to use user card






5.3.6 Set delete card



Notice:

- 1. While green light is flashing, user can set delete card continuously. One lock can have max 10pcs delete cards.
- 2. Swipe the delete card, all user cards will be invalid, then need to set again.
- 3. If you want to delete one user card at one time, please let us know in advance.

6. Reset lock



Notice:

After resetting, the lock will be factory setting and all cards are invalid, need to set cards again.

7. Warm Tips

- 1. Light shines in blue means batteries are nearly run out, please change new batteries in time.
- 2. One lock can have max 10pcs manager cards, 10pcs delete cards and 30pcs user cards.
- 3. Please make sure the lock can work, batteries are included and all CARDS are set before installation.