


keystudio

New Infrared Wireless Remote Control Module Kits For Arduino

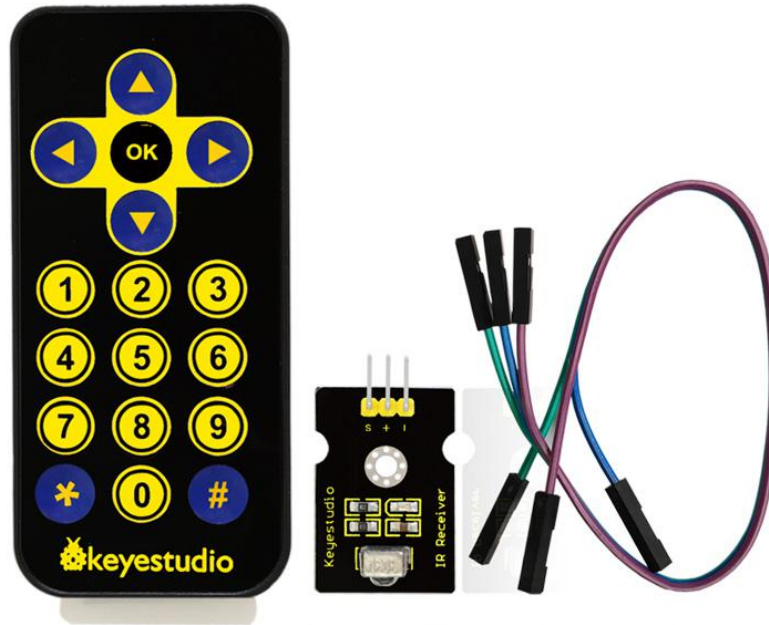

Introduction

Arduino kit of ultra-thin Mini infrared wireless remote control, infrared remote control and 38 KHZ infrared receiving module.

The Mini ultra-thin remote control has 17 function keys, the infrared emission furthest distance up to 8 meters, suitable for controlling indoor devices of all kinds.

Infrared remote control receiving module can receive standard 38 KHZ modulation signals, by programming the Arduino, the remote control signal decoding operation can be realized, which can be used in all kinds of remote control robots and interactive work.


keystudio

Specification

- Battery: CR2025 Button batteries (Included)
- Transmission Distance: up to 8m (depending on the surrounding environment, sensitivity of receiver etc)
- Effective Angle: 60°
- Static Current: 3~5uA, Dynamic Current: 3~5mA

Note: Due to the difference between different monitors, the picture may not reflect the actual color of the item. Thank you!

Connection Diagram

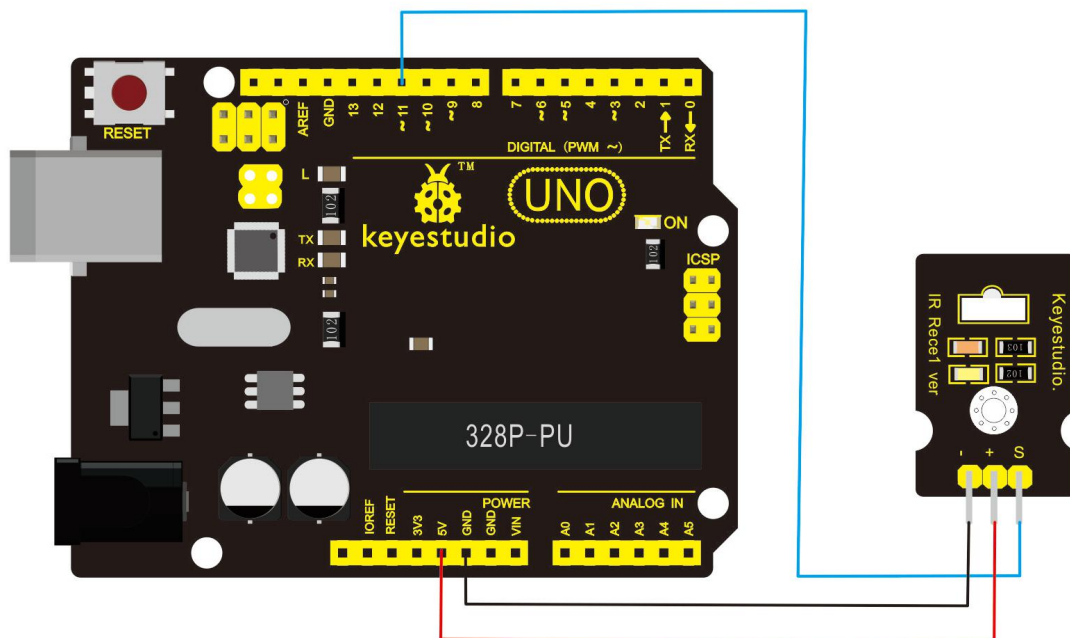

keyestudio

Sample Code

```
*****  
  
#include <IRremote.h>  
  
int RECV_PIN = 11; //define input pin on Arduino  
  
IRrecv irrecv(RECV_PIN);  
  
decode_results results;  
  
void setup()  
{  
  
Serial.begin(9600);  
  
irrecv.enableIRIn(); // Start the receiver  
  
}  
  
void loop() {  
  
if (irrecv.decode(&results)) {  
  
Serial.println(results.value, HEX);  
  
irrecv.resume(); // Receive the next value  
  
}  
  
}  
  
*****
```